

## SECONDARY SIGNAL HEADS


**NOTE:**

1. WHEN SPACE EXISTS ON SINGLE TERMINAL BLOCK ALL HEAD WIRES SHALL BE TERMINATED FOR ARROW AND PED MOVEMENTS.
2. \*SIGNAL HEAD WIRING SHALL PROVIDE 1-SPARE WIRE.
3. ● WIRE NUT SPLICE
4. MASTARM HEAD WIRING SHALL BE 7 CONDUCTOR CABLE.

SIGNAL & PED HEAD WIRES-1/C  
#14 XHHW-2 QTY & QUALITY AS SPECIFIED. TAPE TOGETHER AS DIRECTED BY THE ENGINEER.

RED = RED  
ORN = YELLOW  
BLU = GREEN  
WHT = NEU  
WHT/BLK = YA  
GRN = SPARE  
BLK = GA

MASTARM  
HEAD  
CABLE

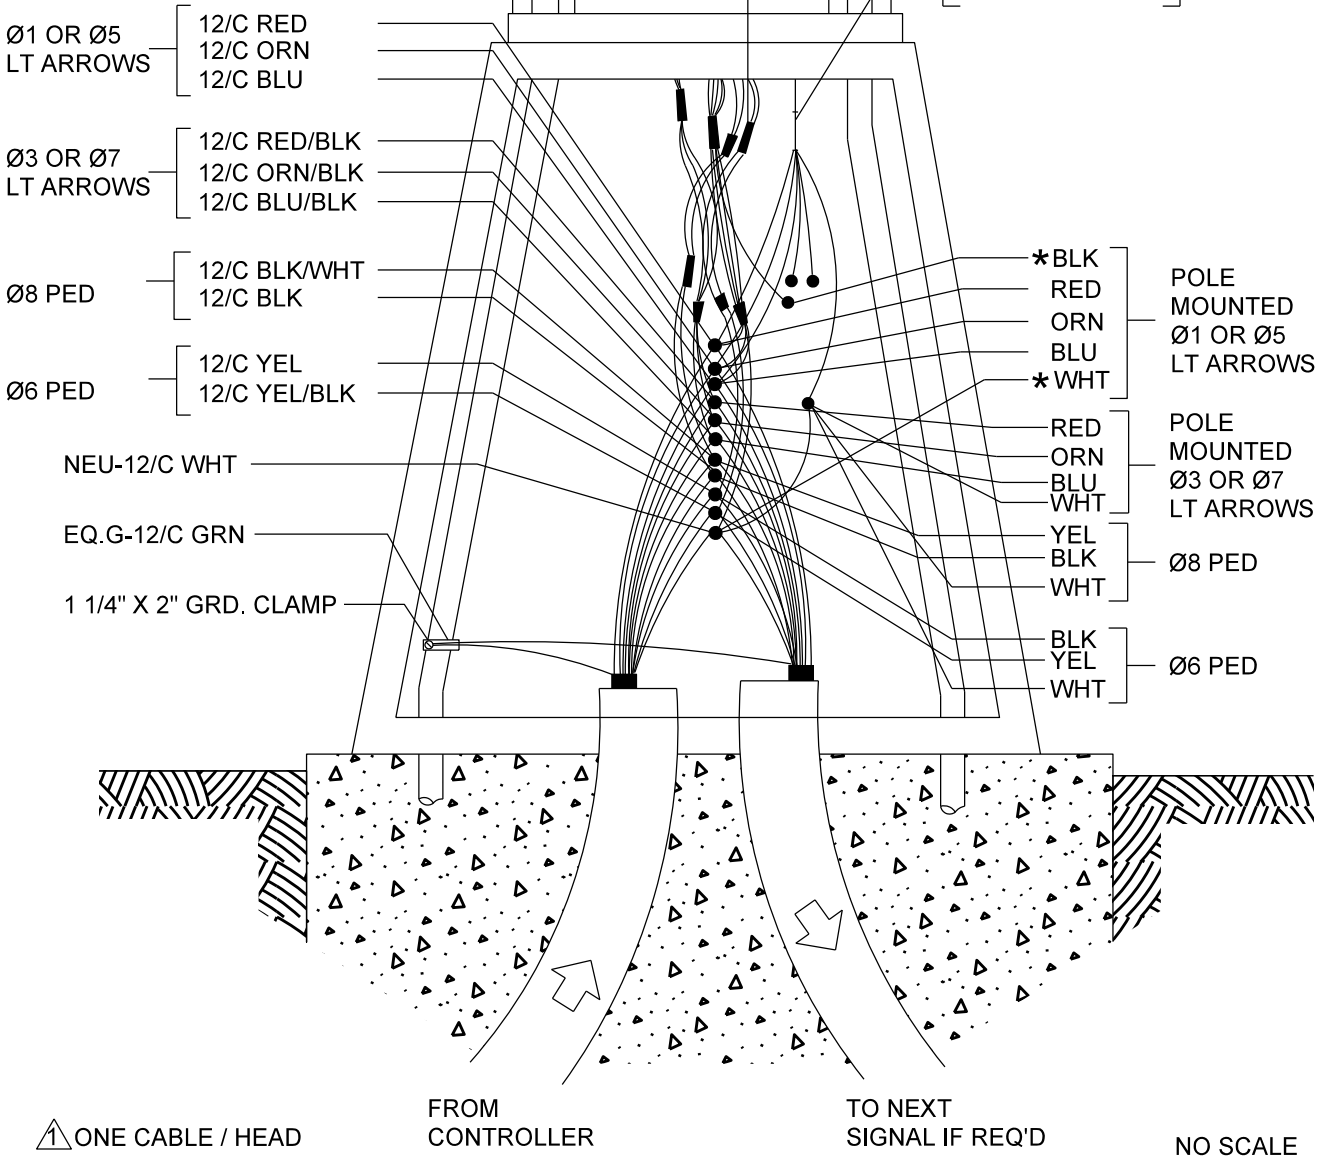

▲ ONE CABLE / HEAD

FROM  
CONTROLLER

TO NEXT  
SIGNAL IF REQ'D

NO SCALE