


- NOTES:
1. BOLT MATERIAL- 36000 PSI MIN. YIELD ROD PER ASTM A36.
 2. FINISH-HOT DIP GALVANIZED PER ASTM A153, NUTS TO RUN FREE AFTER PLATING.
 3. THREAD TO BE CLASS 2A PER AMERICAN STD. B 1.1 AFTER GALVANIZING.
 4. ALL BOLTS CUT THREAD.
 5. 2 GALVANIZED HEAVY HEX NUT PER ASTM A194 GR. 2H. ASSEMBLED AFTER ROD PLATING.
 6. SEE TRAF-3206 FOR POLE SPECIFICATIONS.



NO SCALE

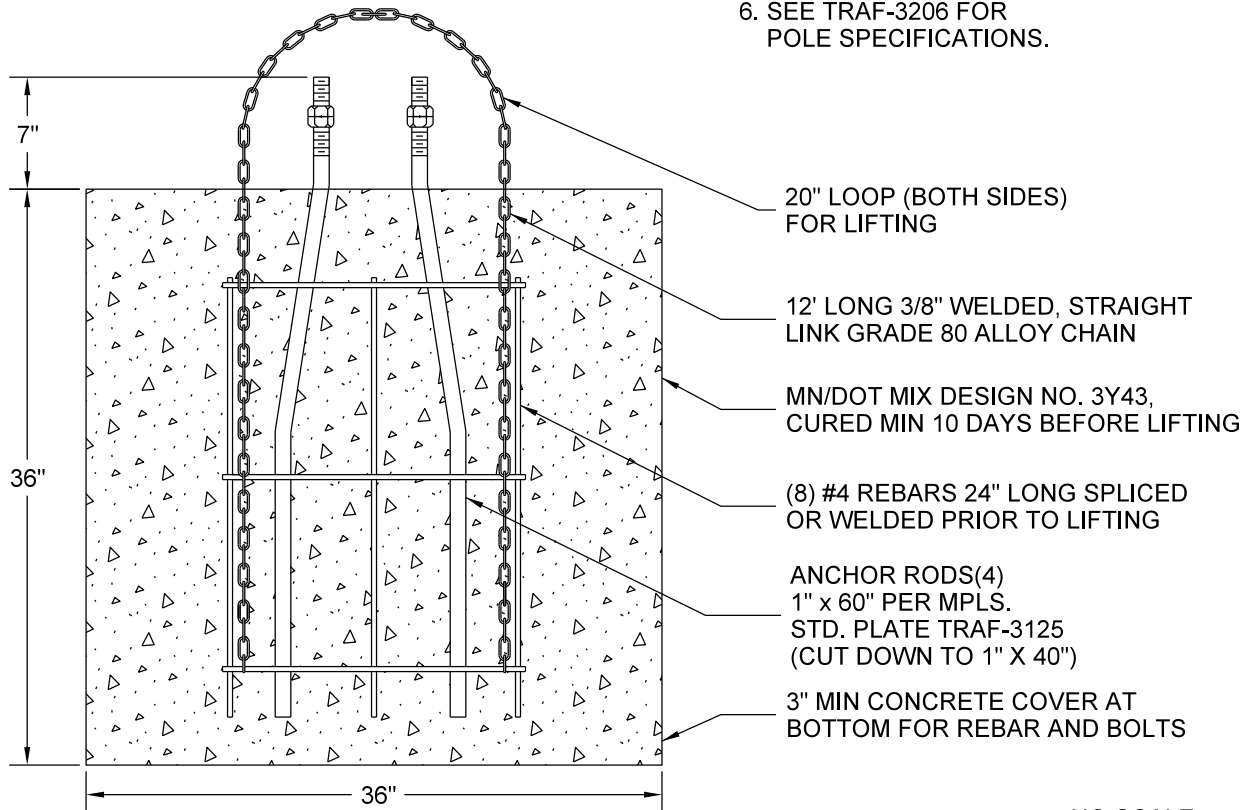

DRW: EAV	DATE: 4/30/19
APP: DRP	DATE: 4/30/19

FOUNDATION - ST. LIGHT
 30' - PORTABLE
 REFERENCE PLATE: TRAF-3125, TRAF-3206

STANDARD
 PLATE
 NO.
 TRAF-3068-R2